

## CPX Closed tank 12000L lowbuilt



CPX Closed tank 12000 L consists of 2 underground 6000 L tanks connected in series. Environmentally friendly, reliable and suitable for all systems and ground conditions.


Including a child-proof lid of 600 mm, outer diameter 800 mm. The tank and lid are tested and approved.

Supplement the tank with a fixed extension neck or our cuttable extension neck for a variable installation depth.

The tank can easily be supplemented with level alarms and connections.

We recommend that the pre-drilled entry point is sealed by welding when delivered by Cipax. Alternatively, it can be sealed with a 110mm ground pipe with a permanent plug (not the lid that the tank comes with). We recommend a connection between the tanks with a 160mm ground pipe for optimal flow, but a 110mm:2 connection can also work. Please note that ground pipes are not included with the tank.

Art.nr: 23060x2

Specifications	
Material	PE
Shape	Rectangular
Bottom shape	Straight
Design	Closed
Lid type	
Color	Black
Volume (L)	12000
Length (mm)	3400
Width (mm)	2600
Height (mm)	1175
Weight (kg)	656
Tollstatistical code	3925100000
Recycling	

## Characteristics



Customizable containers



Recyclable



Chemical resistance



Leak test



Logistics solutions



Easy to clean


Utan lock,  
W/O lid=1200mm

För installation under jord krävs förhöjningshals  
For underground installation extension neck is required

Lock/Lid Ø600mm



Gummimuff/Rubber Sealing DN110

lyftöglor för hantering och installation (8x)  
Lift Loops for handling and installation (8x)

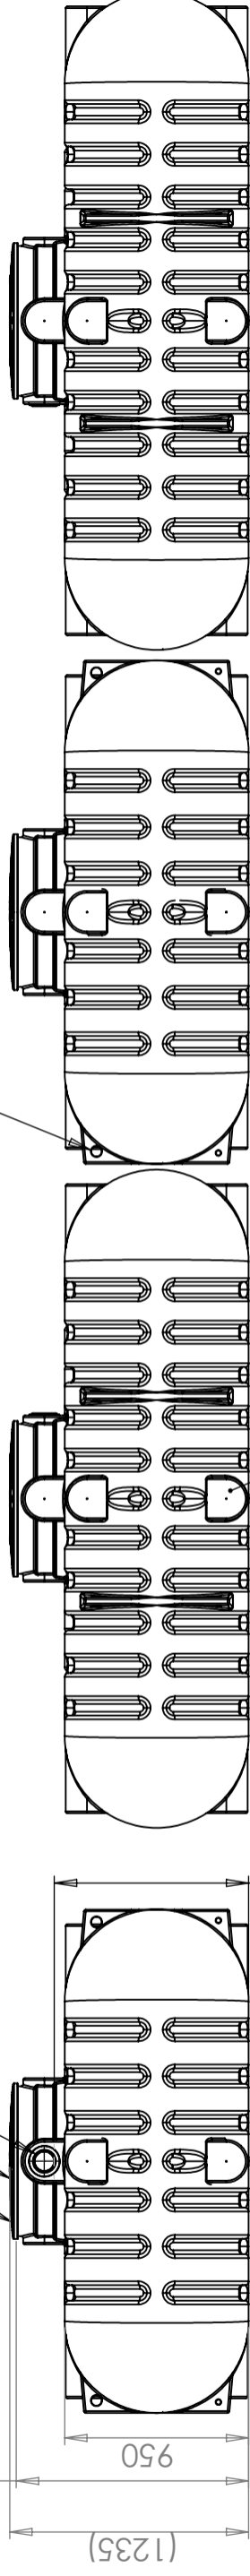

Yta for extra anslutningar (11x)  
Surface for optional connections (11x)

Vattengång in  
Water Entrance =1004mm

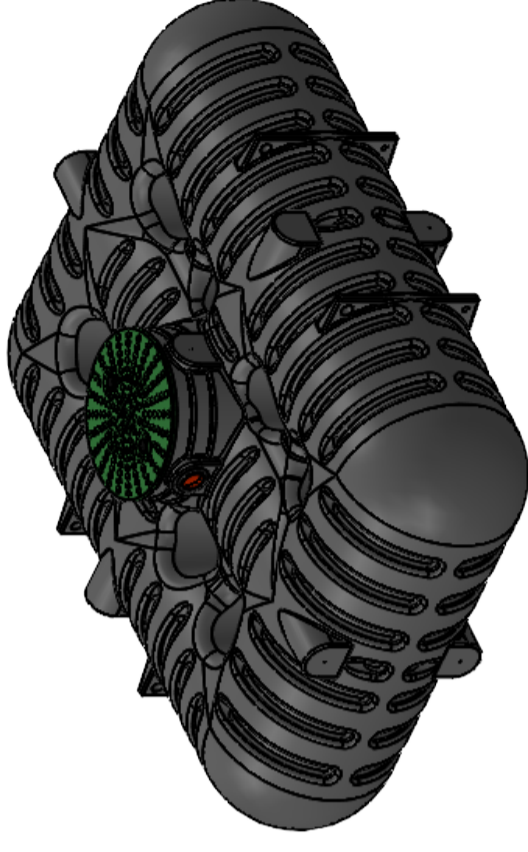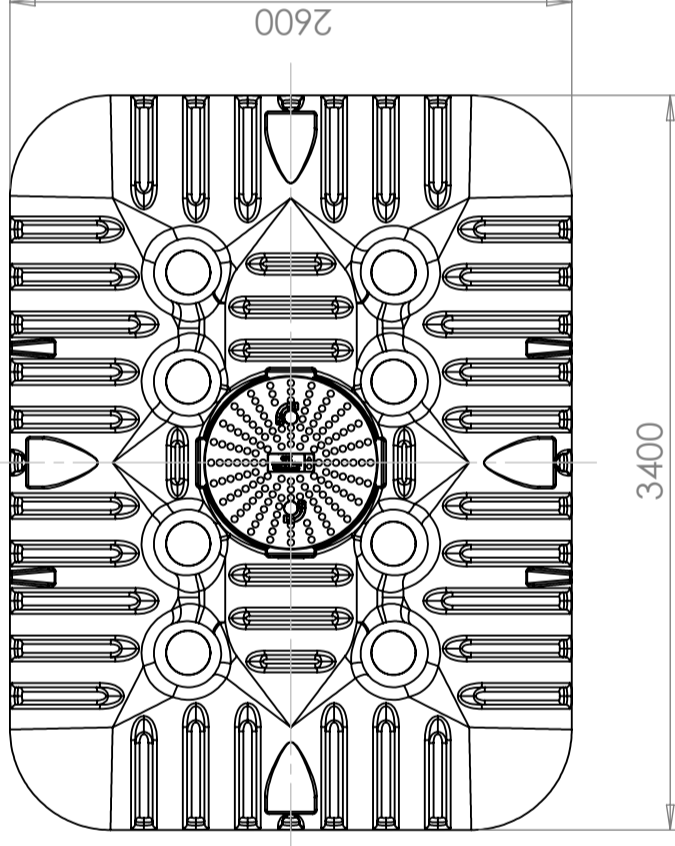

This drawing and design is the property of CIPax.  
Copying and distribution of the drawing or any contents  
is prohibited without written permission from authorised  
personal at CIPax

Revision

Godkänd

Datum

Ändringsmeddelande

REV.

Konstruerad av JA	Granskad av MB	Godkänd av - datum JA 2017-06-19	Generell tolerans SS-ISO 2768-1	Generell Ytjämnhet, Ra	Vyplacering 	Skala 1:30
Ägare	Titel/Benämning CPX Closed Tank 6000L			Ritningsnummer 23060 Assembly		Blad 1(1)
					Utgåva A	

